




Discharge Devices & Nozzles | Foam Sprinkler / Nozzle | AX1 Aspirated Foam-Water Sprinkler Nozzle

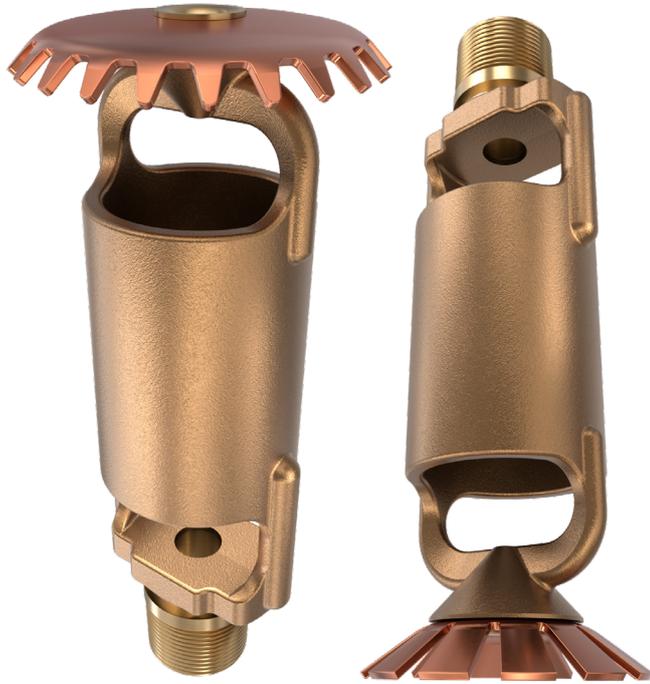

SPECIFICATIONS	
Related documents	Data Page TD1.3.4.27
Approvals	
K Factor	K = 3 (Imperial) / K = 43 (Metric)
Design Pressure	175 psi (12 bar)
Operating Pressure	30 psi (2.07 bar) to 175 psi (12 bar)
Material (Body)	Bronze Alloy CB491K
Material (Deflector)	Phosphor Bronze
Finish	Natural
Connection Type	1/2" (15 mm) Threaded NPT
Variants	Pendent, Upright
Foam Concentrate	See UL Listing / Data Page
Weight	Pendent 0.26kg, Upright 0.269kg
Options	n/a
<p>Note: This foam water sprinkler is UL Listed when used in combination with specific tested foam concentrates. Listed system components can be found at https://iq.ulprospector.com/en/</p>	

Part Number	Description
AX1-3VB-P	Model AX1 Pendent Air Aspirated Foam Water Sprinkler
AX1-3VB-U	Model AX1 Upright Air Aspirated Foam Water Sprinkler
23559B	Wrench for AX1 Air Aspirated Foam Water Sprinklers

Note: This document contains basic product information only. Information, photos and drawings are not contractually binding. In all cases, the manufacturer's full technical documentation (see "Related Documents" above) remains the reference document. Note that certificates, test reports and approvals may be published in the OEM name. The contents of this publication are subject to modifications without notice. All rights reserved.

Trusted above all.

